
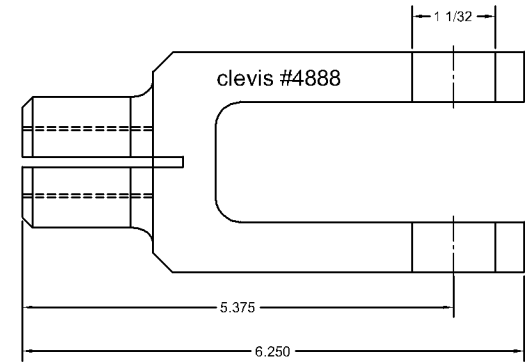


ITEM #	PART NUMBER	QTY	DESCRIPTION
1	35734	1	BARREL ASSY
2	35736	1	ROD
3	36523	1	FRONT HEAD
4	35894	1	PISTON
5	42591-050	2	SPACER .50"
* 6	32196	1	O RING
* 7	32727	1	SNAP RING
* 8	32725	1	SNAP RING
* 9	39192	1	SEAL WASHER
* 10	32662-15	1	ROD SEAL
* 11	32416	1	RETAINING RING
* 12	494	2	PISTON RING
* 13	32464	1	NUT, FLEXLOC
	2896		*Seal Kit

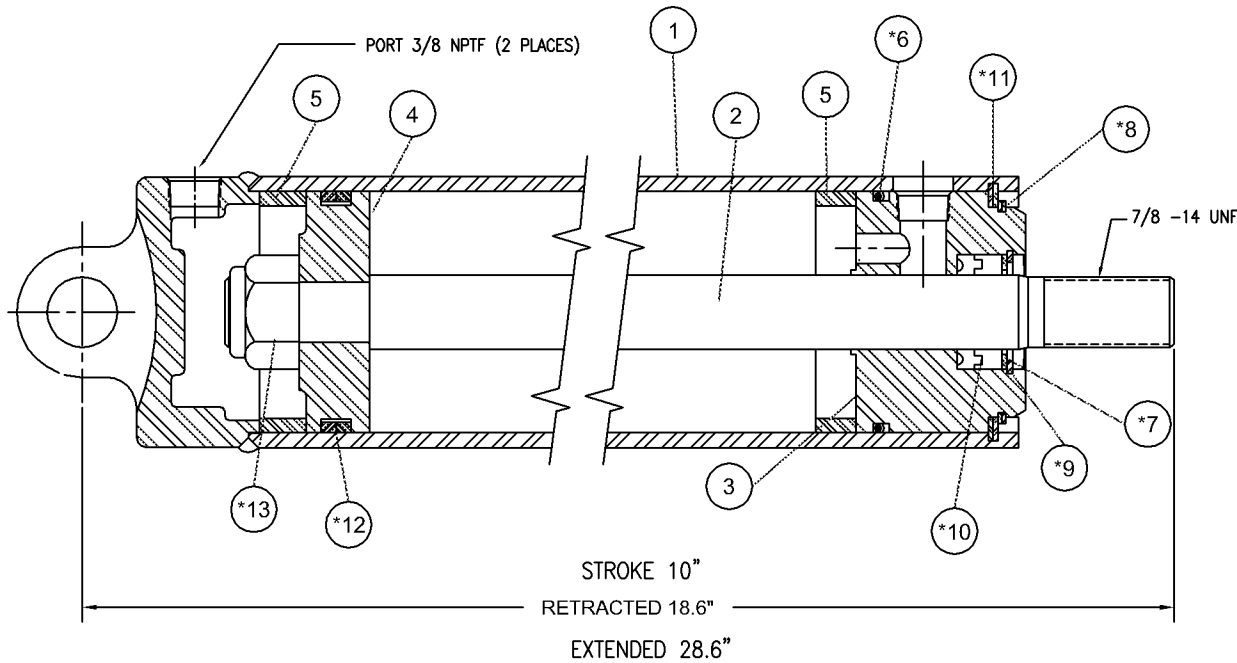

Max PSI: 2500 psi
cylinder dia: 2.5"
spacer: .50"
rod dia: 15/16
unblocked stroke: 11"
blocked stroke: 10"
extended: 28.6"
retracted: 18.6"

1650-1

DRAWN		Tucker Sno-Cat Corp.®	
CHECKED		2875 S. PACIFIC HWY. TUCUMCARI, NM 88401 PH: 505/778-3731	
QA		TITLE Garrison Valve	
APPROVED		2811FR90SP050-1	
DISTRIBUTION		SCALE	REV
TUCKER PART NO		1650-1	
VENDOR PART NO		SHEET 1 OF 1	

Notice: This drawing is not a representation of a proprietary design of Tucker Sno-Cat Corp. It is intended solely for the purpose of facilitating information for manufacturing the items described herein. All rights are reserved and all other uses and reproductions for any other purpose are prohibited.